

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number  
**WO 03/075382 A2**

(51) International Patent Classification<sup>7</sup>: **H01M 8/00**

(21) International Application Number: PCT/GB03/00820

(22) International Filing Date: 27 February 2003 (27.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0205291.8 6 March 2002 (06.03.2002) GB

(71) Applicant: CERES POWER LIMITED [GB/GB]; Unit 18, Denvale Trade Park, Haslett Avenue East, Crawley, West Sussex RH10 1SS (GB).

(72) Inventors: STEELE, Brian, Charles, Hilton; Shiptonlee, Heathway, East Horsley, Surrey KT24 5ET (GB). ATKINSON, Alan; 9 Chapel Lane, Sutton Courtenay, Abingdon,




Oxon OX14 4AN (GB). KILNER, John, Anthony; 34 Castle Avenue, Ewell, Surrey KT18 2PQ (GB). BRANDON, Nigel, Peter; 60 York Road, Sutton, Surrey SM2 6HJ (GB). RUDKIN, Robert, Arthur; 53 Sedley Rise, Loughton, Essex IG10 1LS (GB). OISHI, Naoki; Flat 128 West Kensington Court, Edith Villas, London W14 9AD (GB).

(74) Agents: ILLINGWORTH-LAW, William, Illingworth et al.; D Young & Co, 21 New Fetter Lane, London EC4A 1DA (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,

[Continued on next page]

(54) Title: FORMING AN IMPERMEABLE SINTERED CERAMIC ELECTROLYTE LAYER ON A METALLIC FOIL SUBSTRATE FOR SOLID OXIDE FUEL CELL

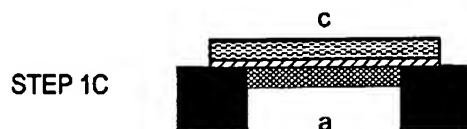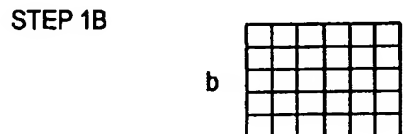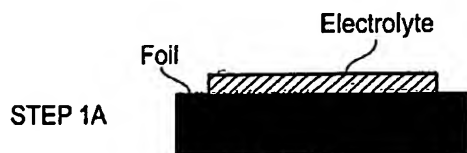

(57) Abstract: An impermeable sintered ceramic electrolyte layer of a solid oxide fuel cell is formed by depositing ceramic powder on a substrate using electrophoretic deposition, isostatically pressing that deposited ceramic layer and then heating the compressed ceramic powder layer at temperatures below 1000 °C. In preferred embodiments the ceramic thick film fuel cell assembly is formed upon a ferritic stainless steel substrate.

WO 03/075382 A2